

## KANATOL - 8A


### DI – OCTYL ADIPATE (DOA)

#### Primary plasticizer for PVC and PVC copolymers

#### Chemical Nature

Adipic acid ester of C<sub>8</sub>alcohol

Chemical Name :- Bis ( 2-Ethylhexyl ) Adipate  
 Trade Name :- DOA ,DEHA  
 Molecular Formula :- C<sub>22</sub>H<sub>42</sub>O<sub>4</sub>  
 Molecular Weight :- 370  
 Molecular Structure :- (CH<sub>2</sub>)<sub>4</sub>(COOC<sub>8</sub>H<sub>17</sub>)<sub>2</sub>

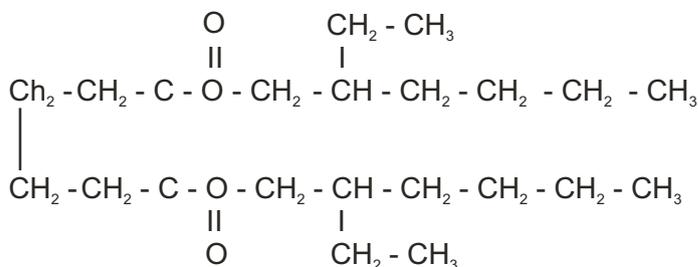

CAS Number :- 103-23-1  
 UN. NO :-  
 EINECS NO :-

#### Specification

Characteristics	Unit	Test Method	Value
Colour	HU	ASTM-D-1045-86	30 max.
Volatile Loss (130°C/ 3Hrs)	wt.%	KLJTM	0.1 max.
Ester Value	mg KOH/g	ASTM-D-1045-86	302 – 306
Acidity	wt.%	ASTM-D-1045-86	0.020 max.
Moisture	wt.%	ASTM-E-203	0.10 max.
Specific Gravity (27°C)	-	ASTM-D-1045-86	0.922 – 0.926
Ester content	wt.%	ASTM-D-1045-86	99.50 min.
Heat Stability (180°C/ 2Hrs)	HU	ISI-9591-96	40 HU
Acidity after heat treatment	wt.%	ASTM-D-1045-86	0.04
Plasticizing Esters by GC	% by area	KLJTM	99.50 min.
Residual alcohol	% by area	KLJTM	0.10 max..

#### Typical Properties

Volume Resistivity	Ohmcm	KLJTM	3.2 ± 0.2 X 10 <sup>11</sup>
Boiling Point	°C	Lit	335
Pour point	°C	Lit.	-75
Viscosity at 20°C	cp	KLJTM	14 ± 2
Refractive Index (27°C)	-	ASTM-D-1045-86	1.446-1.450

#### Total Solution in Plasticizers

# KLJ Group

Trust built on performance



## KANATOL - 8A

### Properties

**DOA** is almost colourless and odourless oily liquid, free of foreign materials. Does not dissolve in water, dissolves in organic solvents, like the chloroform, gasolene, ethyl acetate, methanol, toluene, mineral oil, vegetable oil, etc; slight soluble in ethylene glycol.

### Application

**DOA** is a highly efficient plasticizers which imparts excellent low temperature flexibility and resistance to impact to the base resin. For these reasons it finds wide use in polymeric systems based on vinyl, nitrocellulose and rubber .

It is extensively used in food contact application. In addition to its high efficiency and contribution to the low temperature properties of vinyl **DOA** is chemically stable and resistant to discoloration on extended exposure to heat and ultraviolet light.

The combination of low viscosity and efficiency provide excellent dry blending and processing characteristics.

When used in plastisols, **DOA** imparts low initial viscosity and good viscosity stability.

**Plasticizing Efficiency** 0.93

**Packing & Storage** **DOA** is packed in 200/225 kg iron drum / HDPE drum, 20 - 22 MT in Flexi tank / ISO tank / road tanker. It is stored in tightly closed container, in a cool & dry, ventilated area.

**Shelf Life** Original characteristics remain intact for 24 months, if kept in recommended storage.

**Safety** The MSDS can be provided on request.

**Disclaimer** The data contained in this publication are based on our current knowledge and experience. During processing, there are so many factors which may affect the application part of **DOA**, so these data neither imply any guarantee of certain properties, nor the suitability of the product for the specific purpose. Any data given in this publication may change without prior information and do not constitute the agreed quality of our product.

**DISTRIBUTED BY: R.E. CARROLL, INC., 1570 NO. OLDEN AVE., TRENTON N.J. 08638-3204 USA**  
**T: (609) 695-6211/(800) 257-9365 F: (609) 695-0102 orders@recarroll.com**

[Total Solution in Plasticizers](#)

Contact: [plasticizer@kljindia.com](mailto:plasticizer@kljindia.com)

An ISO 9001:2000 and ISO 14001:2004 conglomerate

[www.kljindia.com](http://www.kljindia.com)